


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ : A62B 9/02, 18/10, F16K 7/02, 7/18		A1	(11) International Publication Number: WO 98/36797
			(43) International Publication Date: 27 August 1998 (27.08.98)
(21) International Application Number: PCT/AU98/00099			(81) Designated States: AU, CA, FI, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(22) International Filing Date: 18 February 1998 (18.02.98)			
(30) Priority Data: PO 5171 18 February 1997 (18.02.97) AU			
(71) Applicant (for all designated States except US): SAFETY EQUIPMENT AUSTRALIA PTY. LTD. [AU/AU]; North Shore Business Park, 35/1 Jubilee Avenue, Warriewood, NSW 2102 (AU).			
(72) Inventors; and (75) Inventors/Applicants (for US only): KLOCKSETH, Martinus, Oliver [SE/AU]; 90 Ashworth Avenue, Belrose, NSW 2085 (AU). JERVMO, Bengt, Yngve, Roland [SE/AU]; 40 James Sea Drive, Greenpoint, NSW 2251 (AU). BERNDTSSON, Goran, Bertil, Claes [AU/AU]; 19 Care Free Road, Elanora Heights, NSW 2101 (AU).			
(74) Agent: F.B. RICE & CO.; 605 Darling Street, Balmain, NSW 2041 (AU).			

(54) Title: PRESSURE COMPENSATING VALVE**(57) Abstract**

This invention relates to a pressure compensating valve and more particularly, but not exclusively, to a balanced pressure compensating valve, or regulator. The valve includes a chamber (6) for containing fluid, defined by a flexible barrier (2) trapped between first (3) and second (4) surfaces. A fluid inlet provides fluid to the interior of the chamber. A fluid outlet selectively allows fluid to pass out of the chamber. Movement of the first (3) and second (4) surfaces relative to each other causes change in contact between the flexible barrier and the first and second surfaces to selectively open the fluid outlet, in a first position, and occlude it between the flexible barrier and one of the surfaces, in a second position.

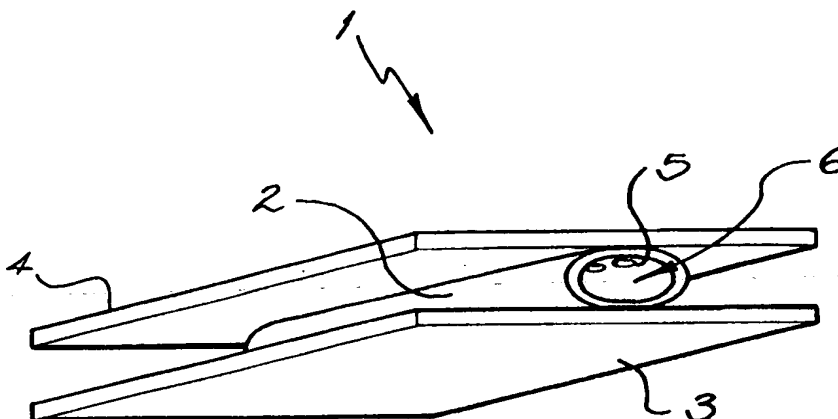

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Pressure Compensating Valve

Field of the Invention

The present invention relates to a pressure compensating valve and
5 more particularly, but not exclusively, to a balanced pressure compensating
valve, or regulator.

Background Art

Pressure compensating valves are widely used in the supply of gases
10 and liquids from a high pressure supply to a low pressure user. It is often
desirable to maintain the low pressure side of the valve at a substantially
constant pressure irrespective of pressure fluctuations on the high pressure
side of the valve. Balanced pressure compensating valves are known for this
purpose.

15 Existing balanced pressure compensating valves are relatively
expensive, complex and difficult to manufacture and service. The present
invention is directed to a pressure compensating valve which can, at least in
preferred embodiments, be made in a very simple form at low cost and with
good performance characteristics.

20

Summary of the Invention

The invention is a pressure compensating valve including: A
chamber for containing fluid, defined by a flexible barrier trapped between
first and second surfaces. A fluid inlet to provide fluid to the interior of the
25 chamber. And a fluid outlet to selectively allow fluid to pass out of the
chamber. Movement of the first and second surfaces relative to each other
causes change in contact between the flexible barrier and the first and
second surfaces to selectively open the fluid outlet, in a first position, and
occlude it between the flexible barrier and one of the surfaces, in a second
30 position.

The flexible barrier may comprise of any one of a number of forms.
In one arrangement the barrier may comprise a tube positioned between the
first and second members and trapped by the friction between the barrier
material and the surfaces.

The fluid inlet may pass through the first surface into the chamber. In this case the flexible barrier may be generally U-shaped in section with both ends connected to the first surface on either side of the fluid inlet.

The fluid outlet may include an aperture in the flexible barrier which
5 is selectively occluded by one of the surfaces in the second position.

There may be a passage between the chamber and the second surface, in which case the fluid outlet may include an aperture in the second surface which is selectively occluded by the flexible barrier in the second position. In this arrangement the flexible barrier may comprise a pair of spaced apart
10 membranes which extend between the surfaces, one on each side of the chamber. The membranes may be connected to the first surface on either side of the fluid inlet, and to the second surface on either side of the passage between the chamber and the second surface.

In its simplest form the valve may act as a one way pressure
15 compensated valve controlling the inflow of high pressure fluid through the valve to a user, whether a human or a mechanical device.

The valve may further comprise an exhaust aperture in one of the first or second surfaces, which is selectively occluded by the flexible barrier in the first and second positions, but open in a third position. In the third
20 position the fluid outlet is occluded. In this way the valve may control both the supply and exhaust of the fluid supply.

Whether the first and second surfaces are flat or curved, relative movement of the two surfaces parallel to each other may cause the flexible barrier to roll along the surfaces to selectively open the fluid outlet.

25 In an alternative the flexible barrier may have a flap-like extension which serves to open and occlude the fluid outlet.

The valve may further comprise a pressure plate connected to one of the first or second surfaces. In use, the pressure plate experiences a variable working pressure on an enclosed side, for instance inside a face mask, and a
30 reference pressure on the other side. The pressure differential across the pressure plate causes movement of the first and second surfaces relative to each other to selectively supply fluid to the enclosed side.

The reference pressure may be atmospheric pressure or some other pressure. When the valve is used in breathing apparatus, other than diving
35 apparatus, the reference pressure will conveniently be atmospheric. During exhalation, when the working pressure exceeds a predetermined relationship

with atmospheric pressure, the pressure plate will be moved towards the reference pressure side of the valve causing the flexible barrier to be rolled over, and occlude, the outlet aperture. Conversely when the working pressure drops, during inhalation, the pressure plate will move in the opposite direction and the outlet aperture will be opened.

In some arrangements the area of the flexible barrier exposed to the working pressure and the reference pressure is equal so that any change in pressure in the fluid supply will not cause the second surface to be moved by differential force on opposed sides of the barrier. In other situations it may be desirable to deliberately utilise different exposed areas on each side of the barrier to bias the second surface towards a desired position.

The valve may further comprise a bias spring associated with the pressure plate to bias the first and second surfaces into predetermined positions relative to each other. In particular the spring may serve to bias the second surface, relative to the first surface, with a defined force into an open position. In this arrangement the valve will be biased into an open position by the spring until the pressure in the mask exceeds that of the surrounding atmosphere by an amount that causes a force to be applied to the one side of the second member to move it, against the spring force, to the closed position.

The chamber may be toroidal, the first and second surfaces may be concentric cylinders, the fluid inlet may be an annular chamber formed on the outer surface of the outer cylinder, and the pressure plate may span the interior of the inner cylinder.

The first and second surfaces may be conveniently formed by injection moulding of a synthetic plastics material, and the flexible barrier may be formed of a suitably flexible rubber or synthetic plastics material. As the valve may be made from only few pieces, and from relatively cheap materials, it can be seen that it may offer significant manufacturing and cost advantages over known pressure compensating valves.

Valves according to the present invention are particularly useful in powered air purifying respirators. Such apparatus may be supplied by air pumped by means of a fan through a suitable filter. Alternatively the respirator may be of a self-contained type for use either underwater or where filtering of the ambient air is inappropriate.

When a pressure compensating valve according to the present invention is used in powered air purifying respirators it may control only the inhalation of air by the user or both inhalation and exhalation. In the former case the respirator will need to incorporate another exhaust valve of some sort.

Brief Description of the Drawings

Several examples of the invention will now be described with reference to the accompanying drawings, in which:-

10 Figure 1a is a schematic diagram illustrating a simple form of the invention in a first position; and Figure 1b is a schematic illustration of the second position.

15 Figure 2a is a schematic diagram of another simple form of the invention in a first position; Figure 2b is a schematic illustration of the second position; and Figure 2c is a schematic illustration of a third position.

Figure 3a is a vertical section through a pressure compensating valve embodying the invention in a first position; Figure 3b shows a second position; and Figure 3c shows a third position.

20 Figure 4a is a vertical section through an alternative pressure compensating valve embodying the present invention in a first position; Figure 4b shows a second position; and Figure 4c shows a third position.

Figure 5a is a vertical section through yet another pressure compensating valve embodying the present invention in a first position; Figure 5b shows a second position; and Figure 5c shows a third position.

25 Figure 6a is a vertical section through yet another pressure compensation valve embodying the present invention in a first position; Figure 6b shows a second position; and Figure 6c shows a third position.

30 Figure 7a is a vertical section through a pressure compensating valve embodying the present invention in combination with a separate exhaust valve, in a first position; Figure 7b shows a second position; and Figure 7c shows a third position.

Figure 8 is a vertical section through a fan driven powered air purifying respirator incorporating the pressure compensating valve of Figures 3.

Figure 9 is a vertical section through a breathing apparatus style respirator supplied with high pressure air and incorporating a conventional regulator and the pressure compensating valve of Figures 3.

Figure 10 is a vertical section through a breathing apparatus style respirator supplied with high pressure air and incorporating a different
5 regulator and the pressure compensating valve of Figures 3.

The same reference numerals have been used throughout the drawings to refer to corresponding features.

10 Detailed Description of the Invention

Figure 1a shows a pressure compensating valve 1 comprising a tube of flexible material 2 trapped between a first planar surface 3 and a second planar surface 4.

A series of holes 5 extending along the upper side of the flexible tube
15 2 penetrate through its walls. The tube 2 itself defines a chamber 6 into which fluid is pumped, from a source which is not shown. In the position shown in Figure 1a the fluid cannot escape from the chamber 6 but remains there at supply pressure.

When the upper planar surface 4 moves to the left with respect to the
20 lower planar surface 3, as indicated by arrow 7 in Figure 1b, the line of holes 5 are rotated anti-clockwise as friction between the tube 2 and the planar members causes it to roll between the planar surfaces. Once the holes clear the upper planar surface 4, fluid may flow through holes 5 from the relatively high pressure within chamber 6 to the relatively low pressure area indicated
25 at the end of arrow 8.

If a reference pressure is provided to the right hand side of the valve arrangement, and a working pressure is applied to the left hand side of upper plate 4, then a reduction in the working pressure will cause the movement indicated by arrow 7 causing fluid to enter the chamber. Conversely, an
30 increase in the working pressure will move planar surface 4 to the right and close the valve.

In Figures 2a and 2b, a very similar valve 1' is shown. In this valve there are a second series of holes 9 extending through the lower plate 3 below the flexible barrier 2.

35 In the first position shown in Figure 2a, the supply fluid cannot escape tube 2. In the second position of Figure 2b where the upper planar

surface is moved to the left fluid is supplied through holes 5 to the left as indicated by arrow 8. In the third position of Figure 2c, movement of the upper planar surface 4 to the right as indicated by arrow 10 closes holes 5 against upper planar surface 4, and maintains them closed as the plate 3 is moved sufficiently to open holes 9, allowing exhaust to flow back in the direction 11.

This valve therefore provides the ability not only to supply fluid, but also to exhaust spent fluid. When the valve is used in breathing apparatus an atmospheric reference pressure is applied to the right hand side of the valve, and a working pressure in a face mask acts on the left hand side of upper planar surface 4. The upper planar surface 4 will move to the left, as indicated by arrow 7 in Figure 2b, when the working pressure falls during inhalation, and to the right, as indicated by arrow 10 in Figure 2c, as the pressure rises during exhalation.

The apparatus shown in Figures 1 and 2 may be rolled up so that the tube 2 comprises a torus as shown in the remaining Figures. The lower planar surface 3 becomes the outer cylindrical wall of a movable valve member 12, and the upper planar surface 4 becomes the inner surface of an annular air supply duct 13. Depending upon the construction the inner, moveable, cylindrical member 12 is closed by an internal wall 14 which prevents fluid from passing through the member and provides a pressure plate. To the right of pressure plate 14 is atmospheric pressure, and to the left, which is inside the face mask 15, there is a variable working pressure.

Referring particularly to Figures 3a, 3b and 3c, the pressure compensating valve shown comprises an injection molded synthetic plastics housing 16 which defines annular duct 13. The movable member 12 is also formed of injection molded plastics material. The housing 16 includes a spigot 17 for connection to an air supply. Air entering through spigot 17 communicates with the annular duct 13 and via a slot 18 which extends around the full inside radius of housing 16, into chamber 6 bounded by the flexible barrier 2.

In this embodiment, the flexible barrier 2 comprises an inner flexible membrane 19 and an outer flexible membrane 20. Membrane 19 is connected along one end 21 to the left hand edge of slot 18, and along the other end 22 to the surface 3 of moveable member 12. And flexible membrane 20 is connected along one end 23 to the right hand edge of radial

slot 18, and along the other end 24 to the surface 3 of inner member 12 adjacent the inner membrane 19. The membranes 19 and 20 are preformed with a U-shaped section and they are arranged so the arms of the 'U' lie against either the inner surface 4 of outer housing 16 or the outer surface 3 of inner member 12. A series of holes 5 penetrate the inner membrane 19 close to its end 22 adjacent the moveable member.

A bias spring 25 urges movable member 12 to the left so that the movable member is in a position shown in Figure 3a. In this condition, air under substantially greater than atmospheric pressure is supplied through spigot 17 via annular duct 13 into the interior 6 of the chamber bounded by flexible membranes 19 and 20 and out through holes 5 into the breathing mask 15; as indicated by arrows 8. The flexible membrane 19 also occludes the series of holes 9 around the inner cylindrical extension 26 of outer member 16.

When the user stops inhaling, pressure within the mask 15 rises just sufficiently to balance the force of the spring 25, and valve member 12 moves to the position shown in Figure 3b. In this condition the holes 5 in the inner membrane 19 are occluded by the exterior surface 3 of moveable member 12. The series of holes 9 around the inner cylindrical extension of outer member 16 also remain occluded by the other end of membrane 19.

As the user starts to exhale the pressure in face mask 15 rises and acts upon pressure plate 14 to drive movable member 12 further to the right, as indicated in Figure 3c. As this happens flexible membrane 19 moves away from the series of holes 9 to enable the exhalation to exhaust to atmosphere, as indicated by arrows 11.

The arrangement shown in Figures 4 operates in essentially the same way as that shown in Figures 3, however, in this case the exhaust apertures 9, instead of being placed around the circumference of the outer member 16 are placed around the outer circumference of the right hand end of movable member 12, that is in the right hand side of surface 3. In the first and second positions shown in Figures 4a and 4b the exhaust holes 9 are occluded by the flexible membrane 20. However, in the third position shown in Figure 4c the movable member 12 is moved sufficiently far to the right that flexible membrane 20 has drawn away from holes 9 and opens the exhaust path 11.

In Figures 5 operation is a little more complicated by the inclusion of a passageway 26 extending from the interior of chamber 6 into the interior of

member 12. In this case, inlet holes 5 are provided around the left hand end of the outer cylindrical housing 3 of movable member 12. In other words, in the left hand side of surface 3. As shown in Figures 4, the exhaust openings are in the right hand side of surface 3.

5 In the first position, shown in Figures 5a, air flows through spigot 17 into the annular space 13, through slot 18 into chamber 6, then through passageway 26a into the interior of member 12 and out through holes 5 into mask 15 as indicated by arrows 8. The holes 5 are occluded by the inner membrane 19 in the second position shown in Figures 5b, and they remain
10 occluded in the third position shown in Figure 5c. However, the exhaust openings 9, which are occluded by flexible member 20 in the first and second position shown in Figures 5a and 5b, are open in the third position shown in Figure 5c.

 In Figures 6, the tubular barrier 2 is formed of a single membrane
15 attached at both its ends to either side of slot 18 in the outer member 16.

 An extension flap 27 extends radially inward from tubular barrier 2, and lies along the outer surface 3 of inner member 12. The distal end of flap 27 is attached into a groove 28 which extends around the circumference of surface 3.

20 A series of openings 5 extend around the inner side of membrane 2 between the point of connection of flap 27 and the connection to the left hand edge of slot 18. Inhalation operates in the same fashion as in Figures 3a and 4a, with the exhaust apertures 9 being closed by flap 27 which overlies them. As the inner member 12 moves to the right, to the second position
25 shown in Figure 6b flap 23 stills overlies holes 9, but as the inner member 12 continues to move to the right, flap 23 is drawn away from apertures 9 as its point of attachment 28 to member 2 is drawn away from surface 3, to allow exhaust along path 11.

 Figure 7 shows an alternative arrangement in which the inlet path is
30 similar to that as shown in Figures 5, but an additional exhaust valve 29 is provided inside face mask 15. The exhaust valve 29 comprises a flexible circular diaphragm 30 connected at its periphery to an inner cylindrical extension 31 of housing 16.

 Radially inwards of its connection to housing 16 the diaphragm 30,
35 when in the relaxed condition, abuts against a circular shoulder 32 on the

housing 16. An inlet flap valve 33 is provided in diaphragm 30 within the area bounded by shoulder 32.

In use, air under substantially greater than atmospheric pressure is supplied through spigot 17 into the duct 13. This air will initially find the valve in the condition as shown in Figure 7a due to the force of bias spring 25 which urges movable member 12 to the left. In this position air flows through the inlet ports 5 in the left hand end of the outer circumference of movable member 12 and through holes in diaphragm 27 underneath flap valve 29 into space bounded by mask 15.

When the user stops inhaling, pressure builds inside mask 15, and when it rises just sufficiently to balance the force of spring 25, the movable valve member 12 moves to the condition shown in Figure 7b and flap valve 33 closes.

As the user starts to exhale, the pressure inside the mask increases, and causes diaphragm 30 to move to the right away from shoulder 32. Air can then flow past shoulder 32 and exhaust through the exhaust ports 9, as shown in Figure 7c by the arrows 11.

The pressure compensating valve may be connected to a fan driven air blower 34 in a fan forced positive air pressure breathing apparatus, as shown in Figure 8. The fan communicates with the valve through a wide diameter hose 35.

The pressure compensating valve may alternatively be connected to an air supply such as a compressed air cylinder 36 like a self-contained breathing apparatus, or alternatively to an industrial pressurised air supply through a regulator 37, as shown in Figure 9. In this case a narrow diameter high pressure hose 38 connects the air cylinder to the regulator. The regulator is, in turn, connected to valve through a wide diameter hose 35 as before.

The pressure compensating valve may also be connected to an air supply such as a compressed air cylinder 36 through a regulator 37 in a self-contained breathing apparatus. In this case two narrow diameter hoses 39 and 40 and connect the regulator with the valve. One of the hoses acts as a pilot hose conveying to the regulator the pressure on the inlet side of valve.

It should be appreciated that the pressure compensating valve may be embodied in many other ways besides those described above. For instance, although all the embodiments show a valve having a generally circular

configuration it could work equally well with other configurations such as oval or even square. Where a circular configuration is employed the surfaces need not be cylindrical but could be conical. Alternatively, a linear configuration could be envisaged where the flexible barrier is straight and
5 has a connection at either end to a hinge that lies parallel to its axis. Depending on the configuration the flexible barrier may roll, stretch or deform as the two surfaces move relative to each other to open and occlude the fluid outlet.

10 It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

Claims:-

1. A pressure compensating valve including:
a chamber for containing fluid defined by a flexible barrier trapped
5 between first and second surfaces;
a fluid inlet to provide fluid to the interior of the chamber; and
a fluid outlet to selectively allow fluid to pass out of the chamber;
wherein, movement of the first and second surfaces relative to each
other causes change in contact between the flexible barrier and the first and
10 second surfaces to selectively open the fluid outlet, in a first position, and
occlude it between the flexible barrier and one of the surfaces, in a second
position.
2. A pressure compensating valve according to claim 1, wherein the
15 fluid inlet passes through the first surface into the chamber.
3. A pressure compensating valve according to claim 1 or 2, wherein the
fluid outlet includes an aperture in the flexible barrier which is selectively
occluded by one of the surfaces, in the second position.
20
4. A pressure compensating valve according to claim 1 or 2, wherein
there is a passage between the chamber and the second surface, and the fluid
outlet includes an aperture in the second surface which is selectively
occluded by the flexible barrier, in the second position.
25
5. A pressure compensating valve according to any preceding claim,
further comprising an exhaust aperture in one of the first or second surfaces
which is selectively occluded by the flexible barrier in the first and second
positions, but open in a third position in which the fluid outlet is occluded.
30
6. A pressure compensating valve according to any preceding claim,
wherein movement of the first and second surfaces parallel to each other
causes the flexible barrier to roll along the surfaces to selectively open the
fluid outlet.
35

7. A pressure compensating valve according to any preceding claim, wherein a flap-like extension of the flexible barrier selectively opens and occludes the fluid outlet.

5 8. A pressure compensating valve according to any preceding claim, further comprising a pressure plate connected to one of the first or second surfaces wherein, in use, the pressure plate experiences a variable working pressure on an enclosed side and a reference pressure on the other side; the
10 and second surfaces relative to each other to selectively supply fluid to the enclosed side.

9. A pressure compensating valve according to claim 6 , further comprising a bias spring associated with the pressure plate to bias the first
15 and second surfaces into predetermined positions relative to each other.

10. A pressure compensating valve according to claim 6 or 7, wherein the chamber is toroidal, the first and second surfaces are concentric cylinders, the fluid inlet is an annular chamber formed on the outer surface of the outer
20 cylinder, and the pressure plate spans the interior of the inner cylinder.

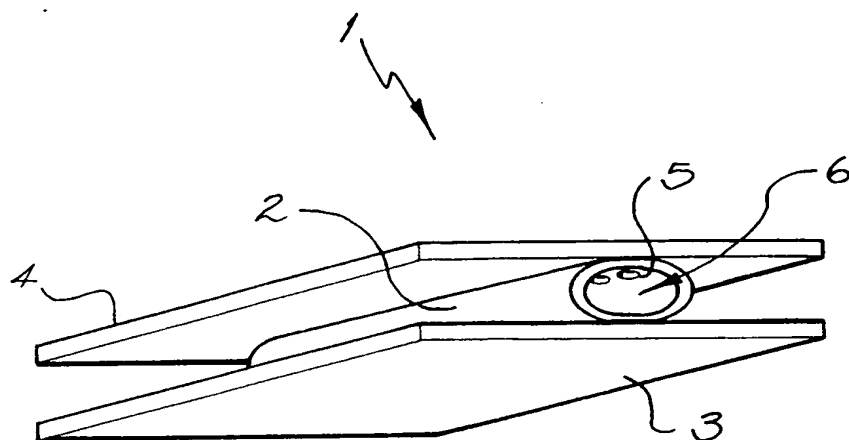


FIG. 1a

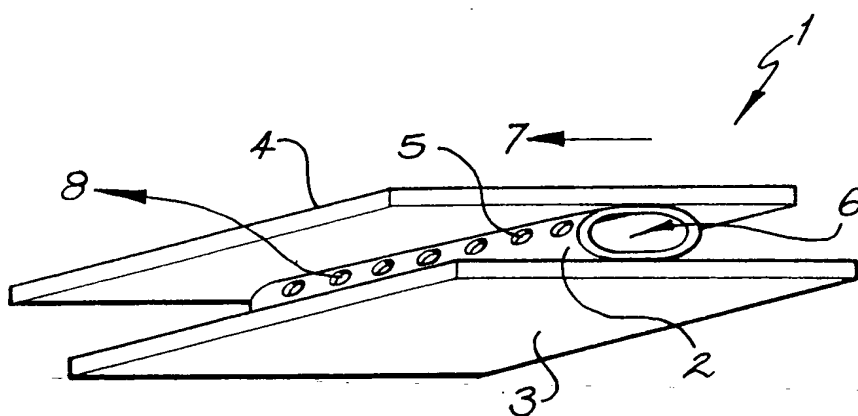


FIG. 1b

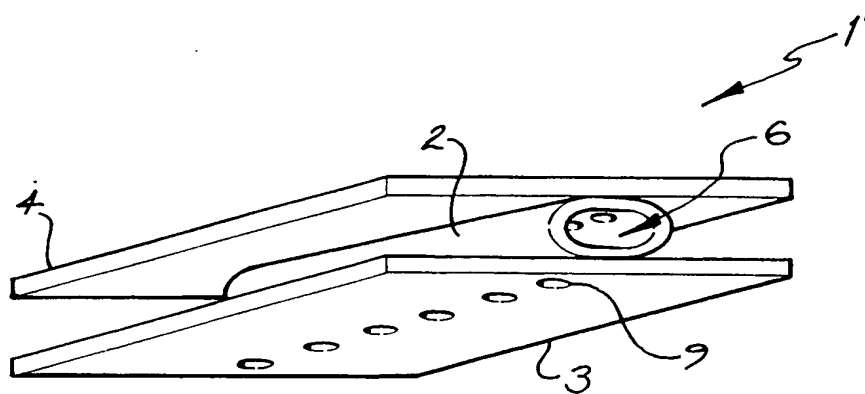


FIG. 2a

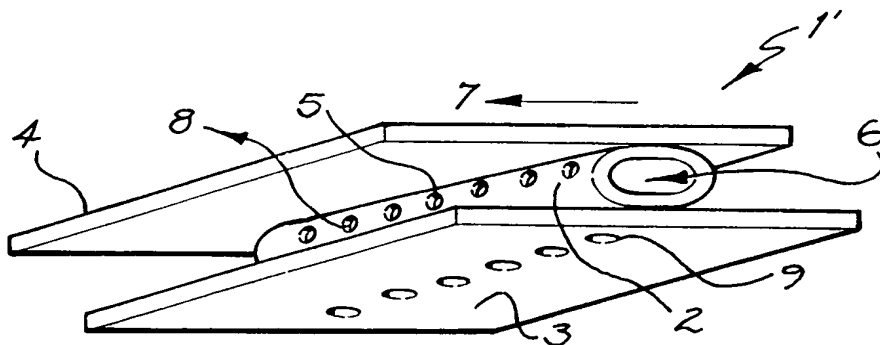


FIG. 2b

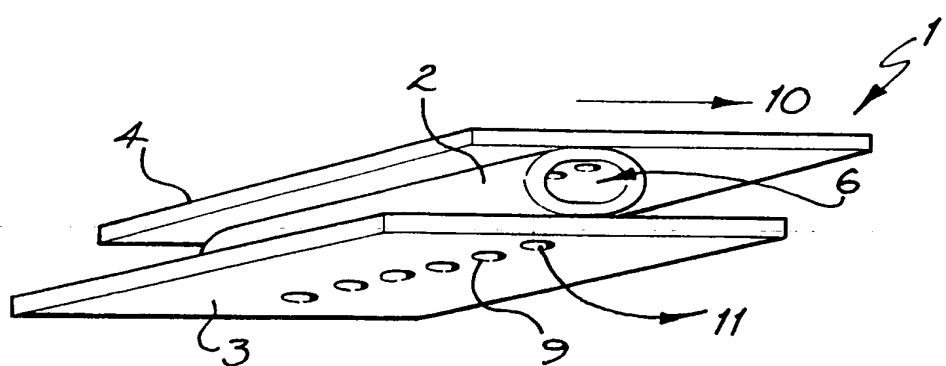


FIG. 2c

3/10

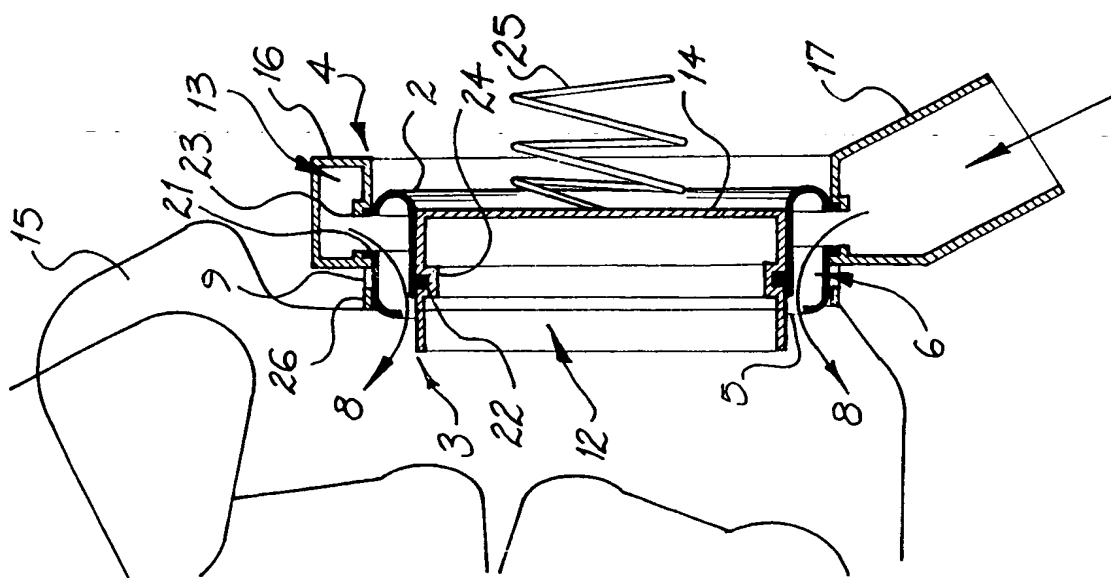


FIG. 3a

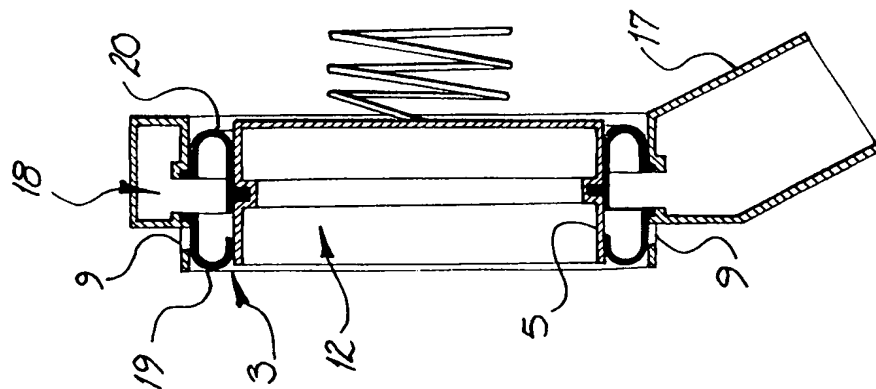


FIG. 3b

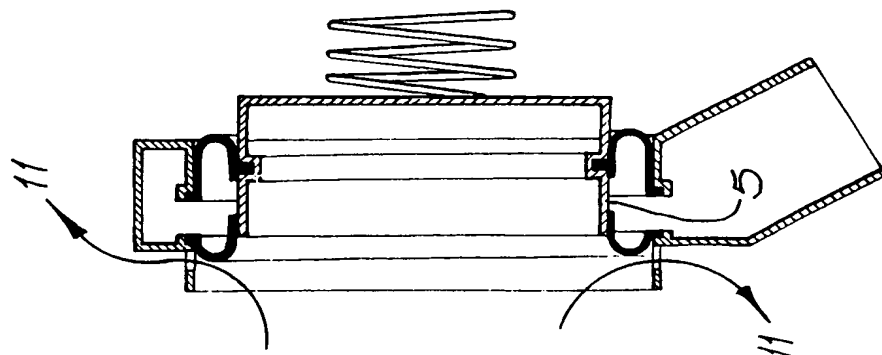


FIG. 3c

4/10

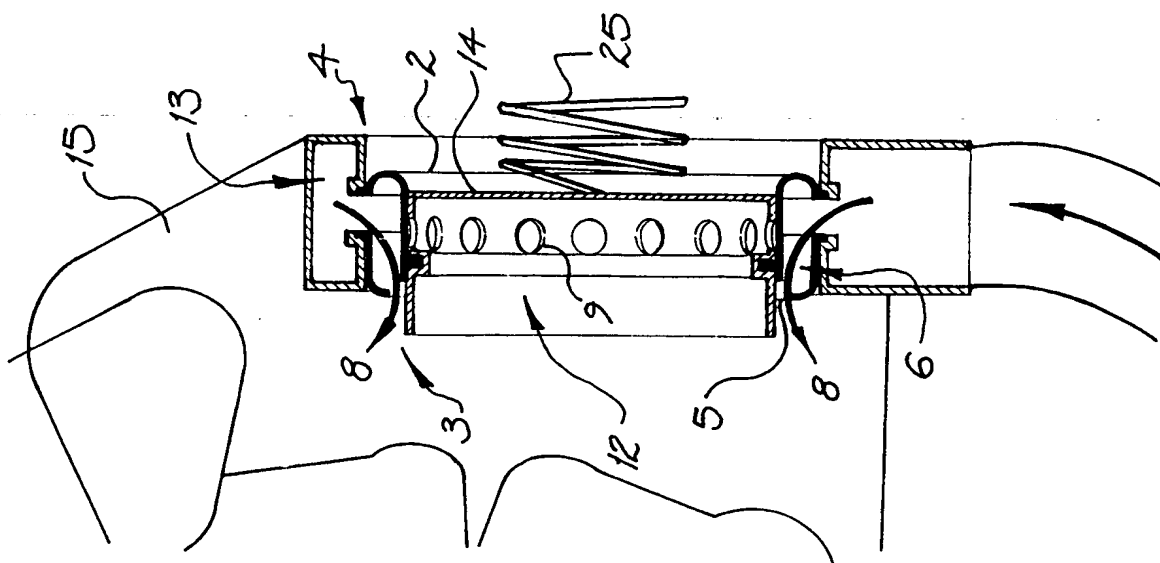


FIG. 4a

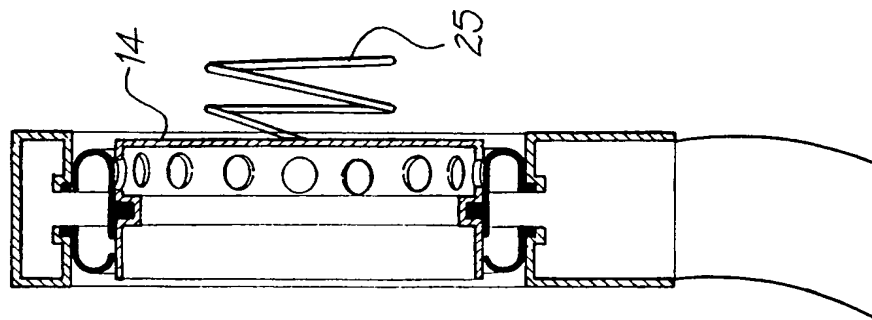


FIG. 4b

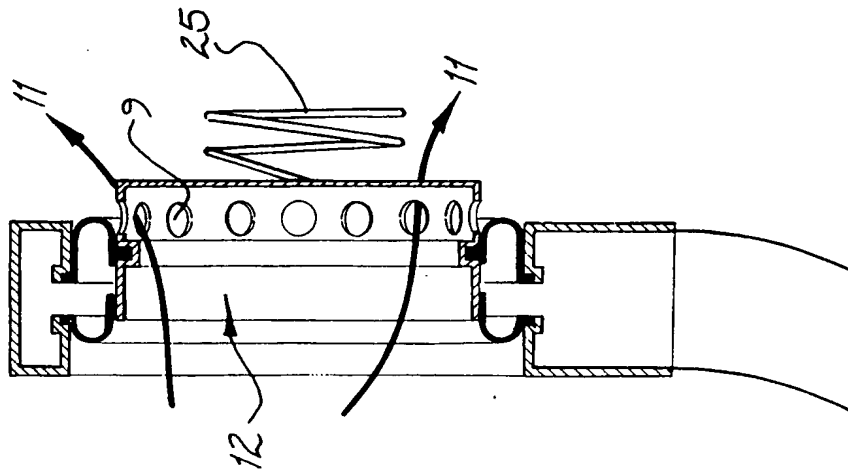


FIG. 4c

5/10

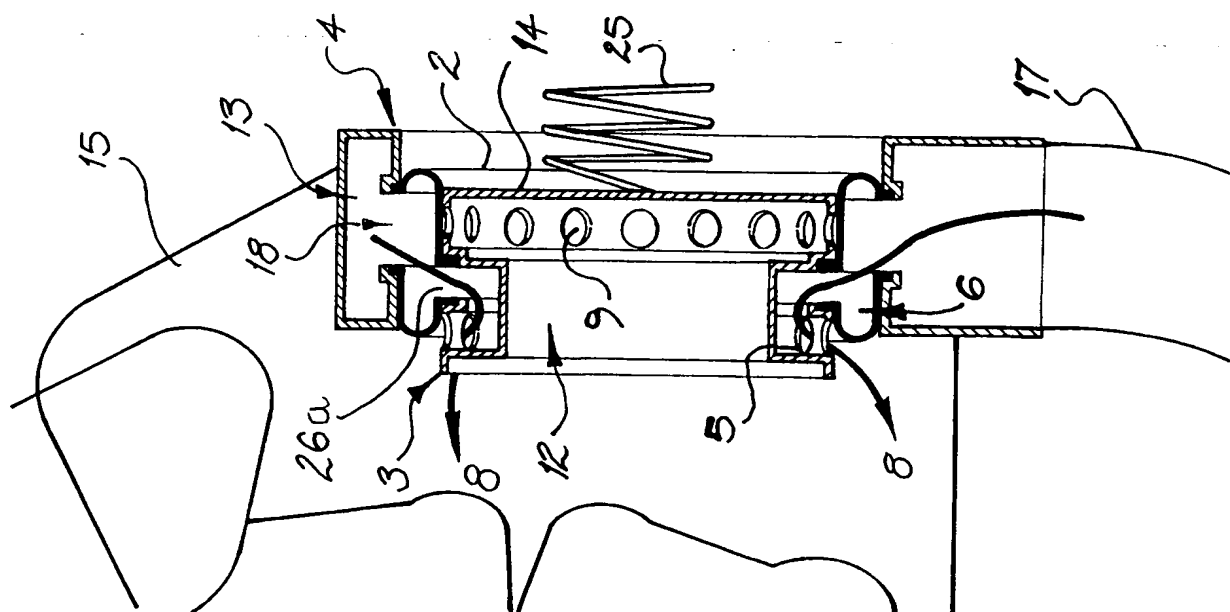


FIG. 5a

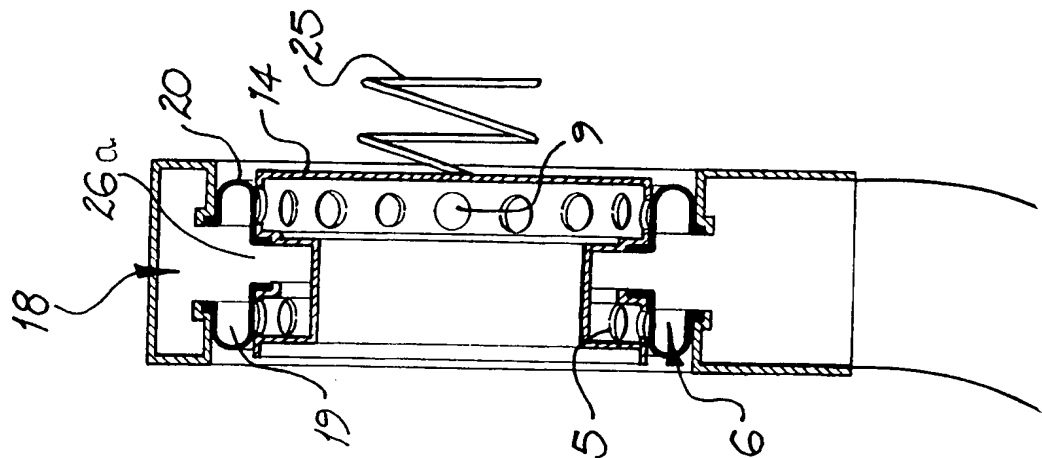


FIG. 5b

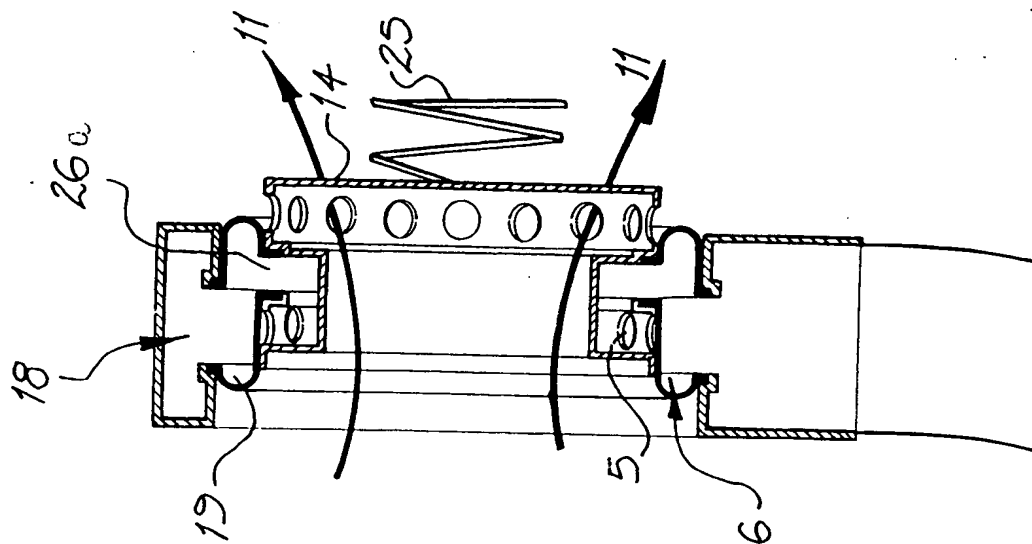


FIG. 5c

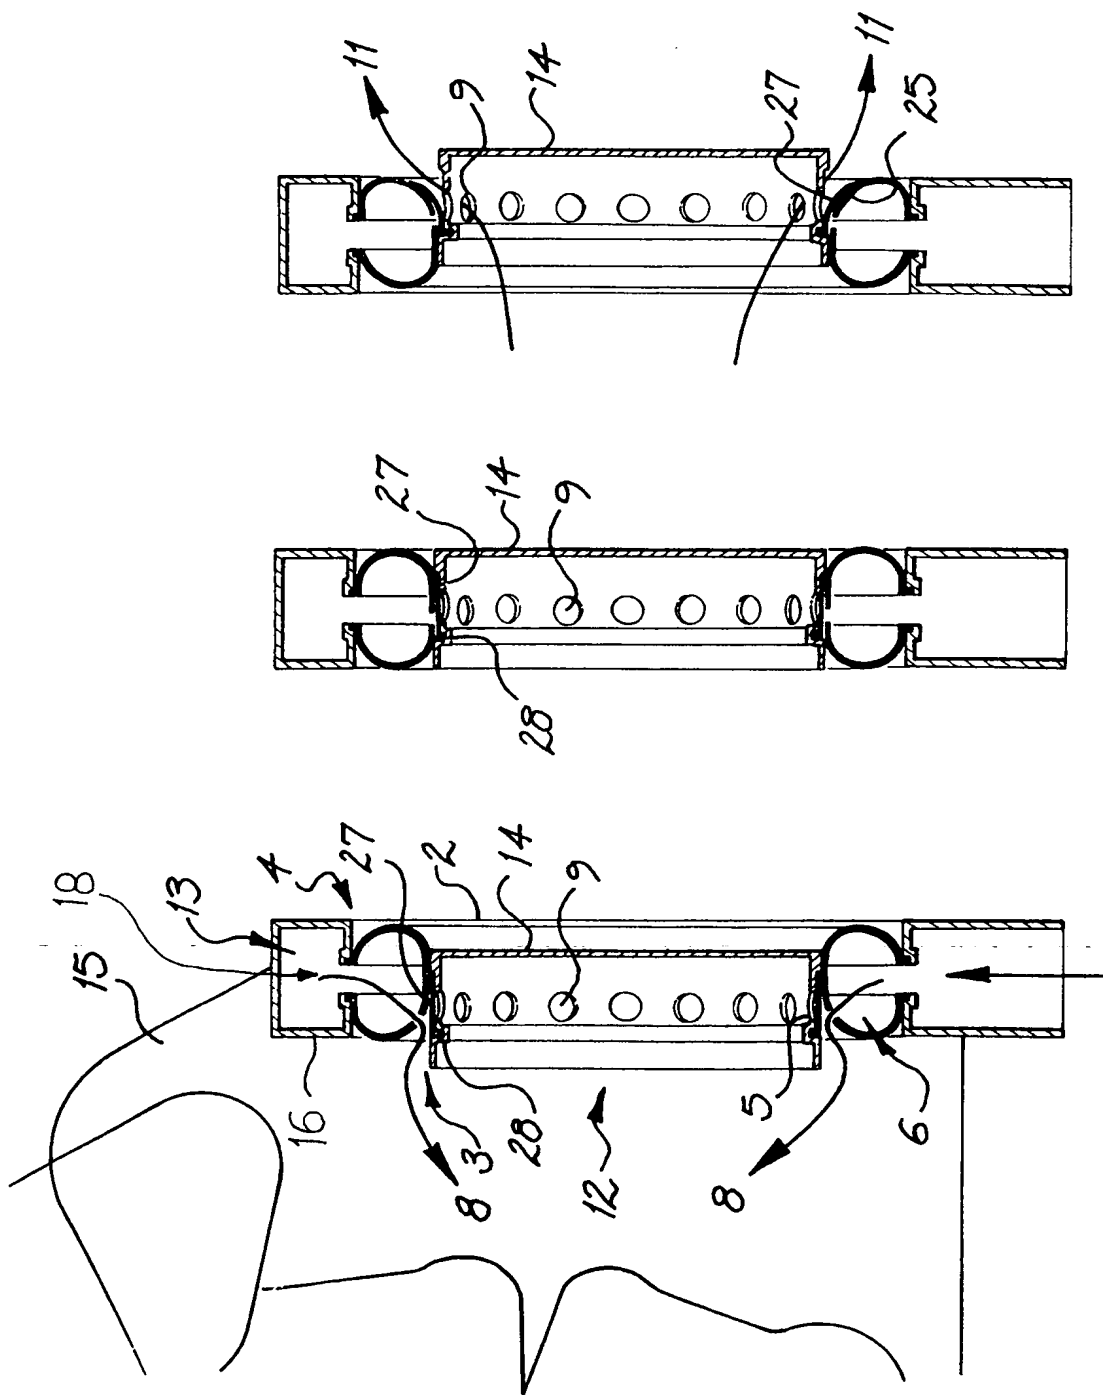


FIG. 6c

FIG. 6b

FIG. 6a

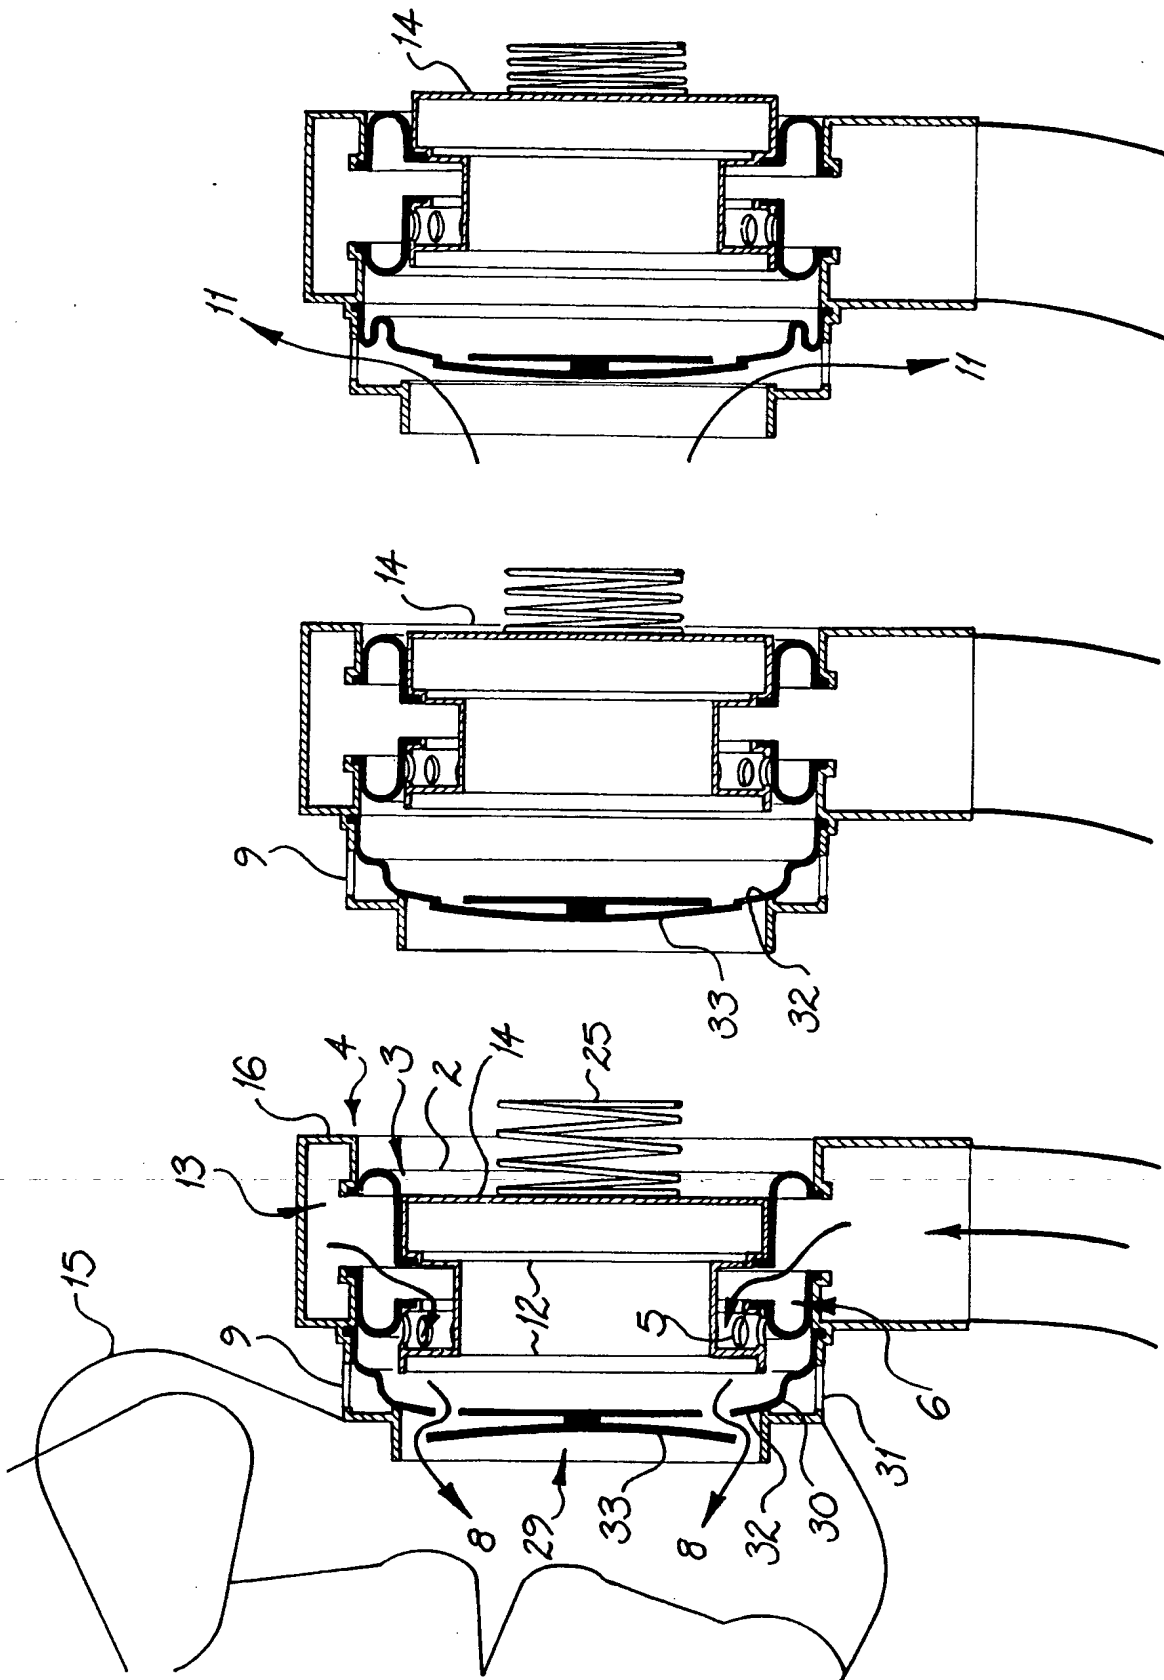


FIG. 7c

FIG. 7b

FIG. 7a



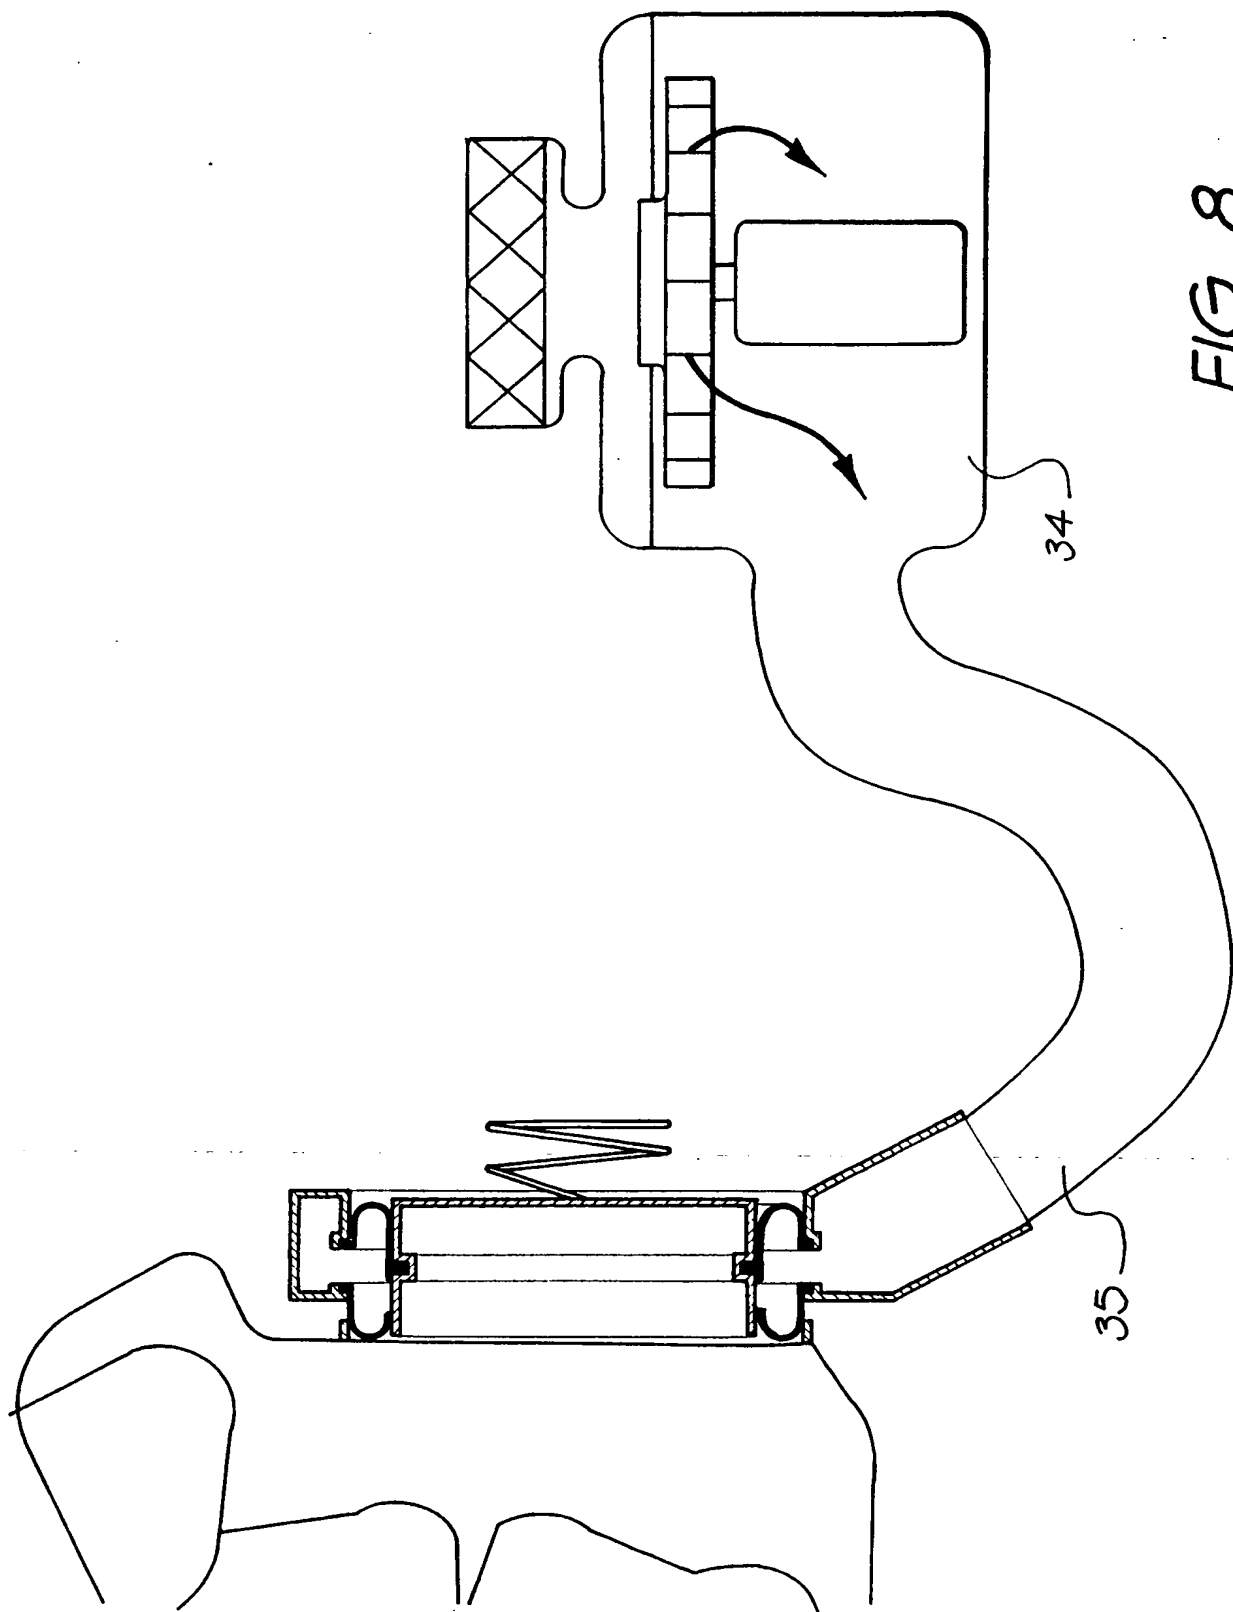


FIG. 8

FIG. 9

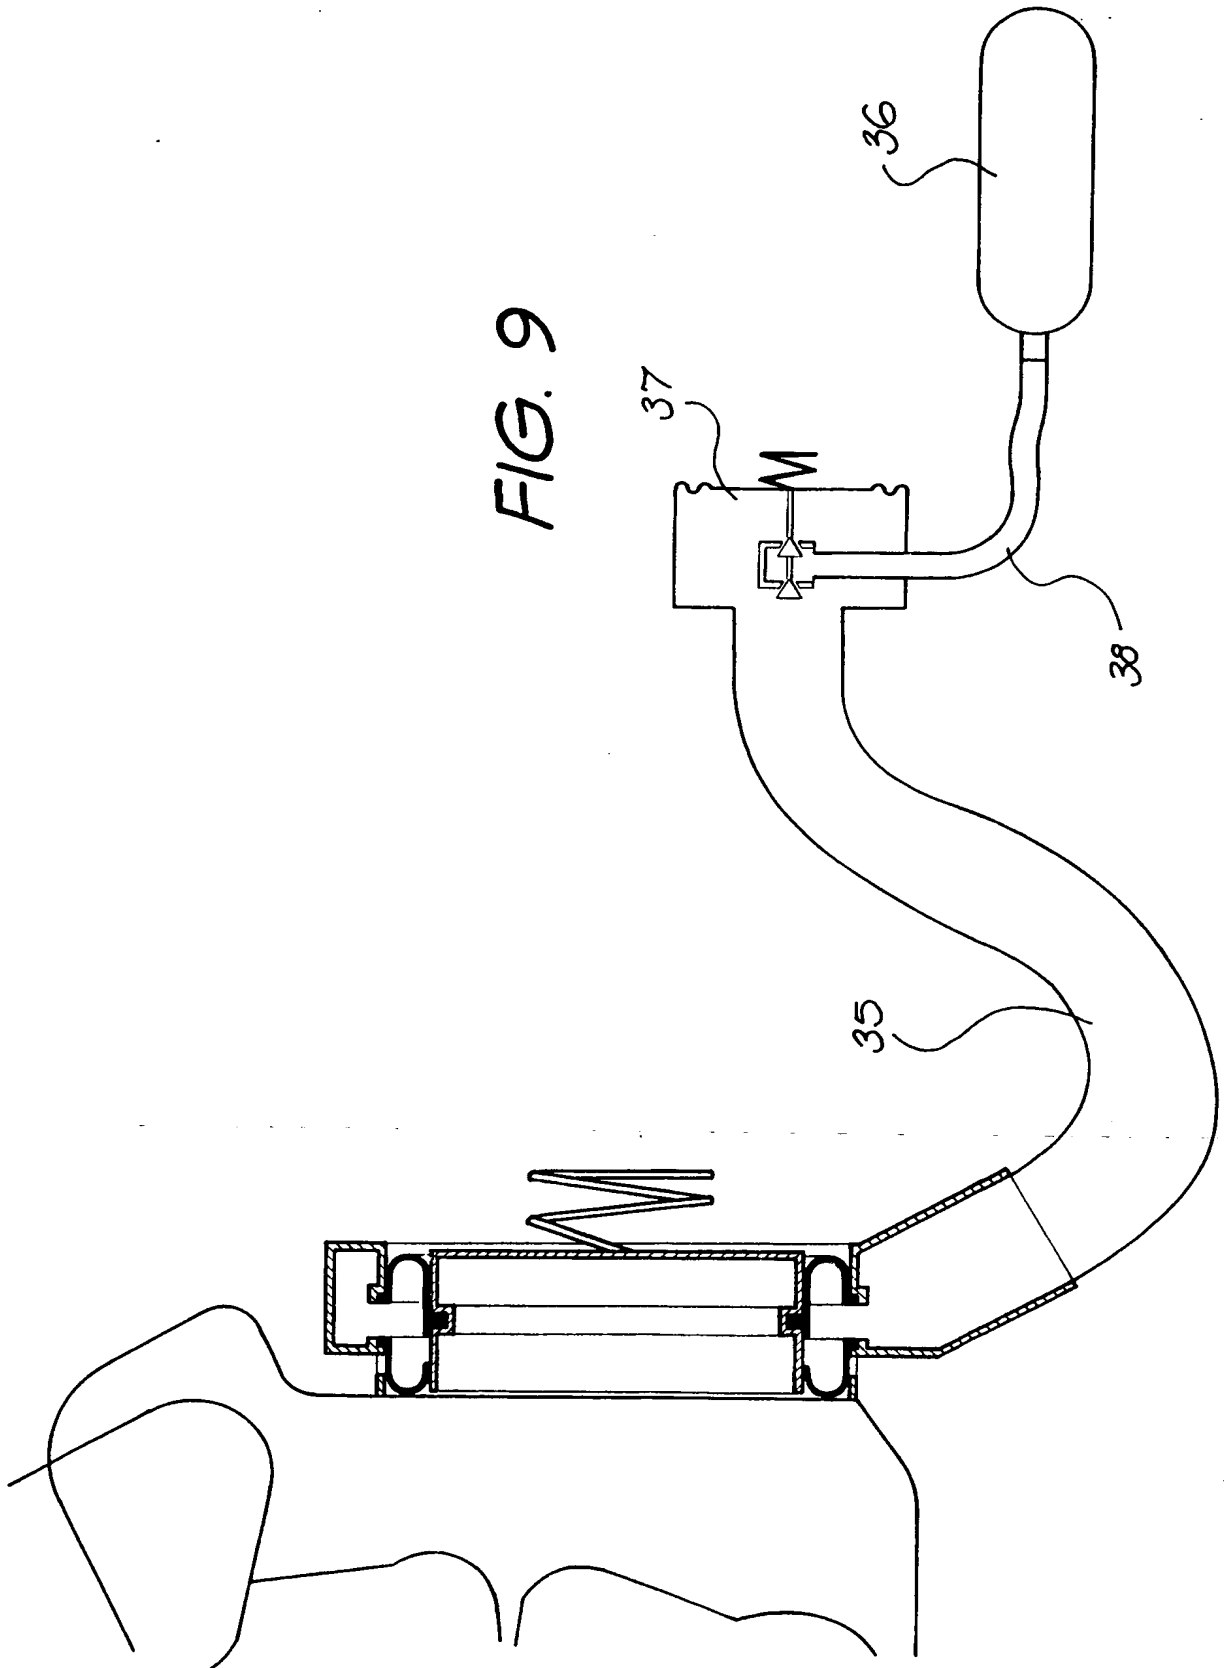


10/10

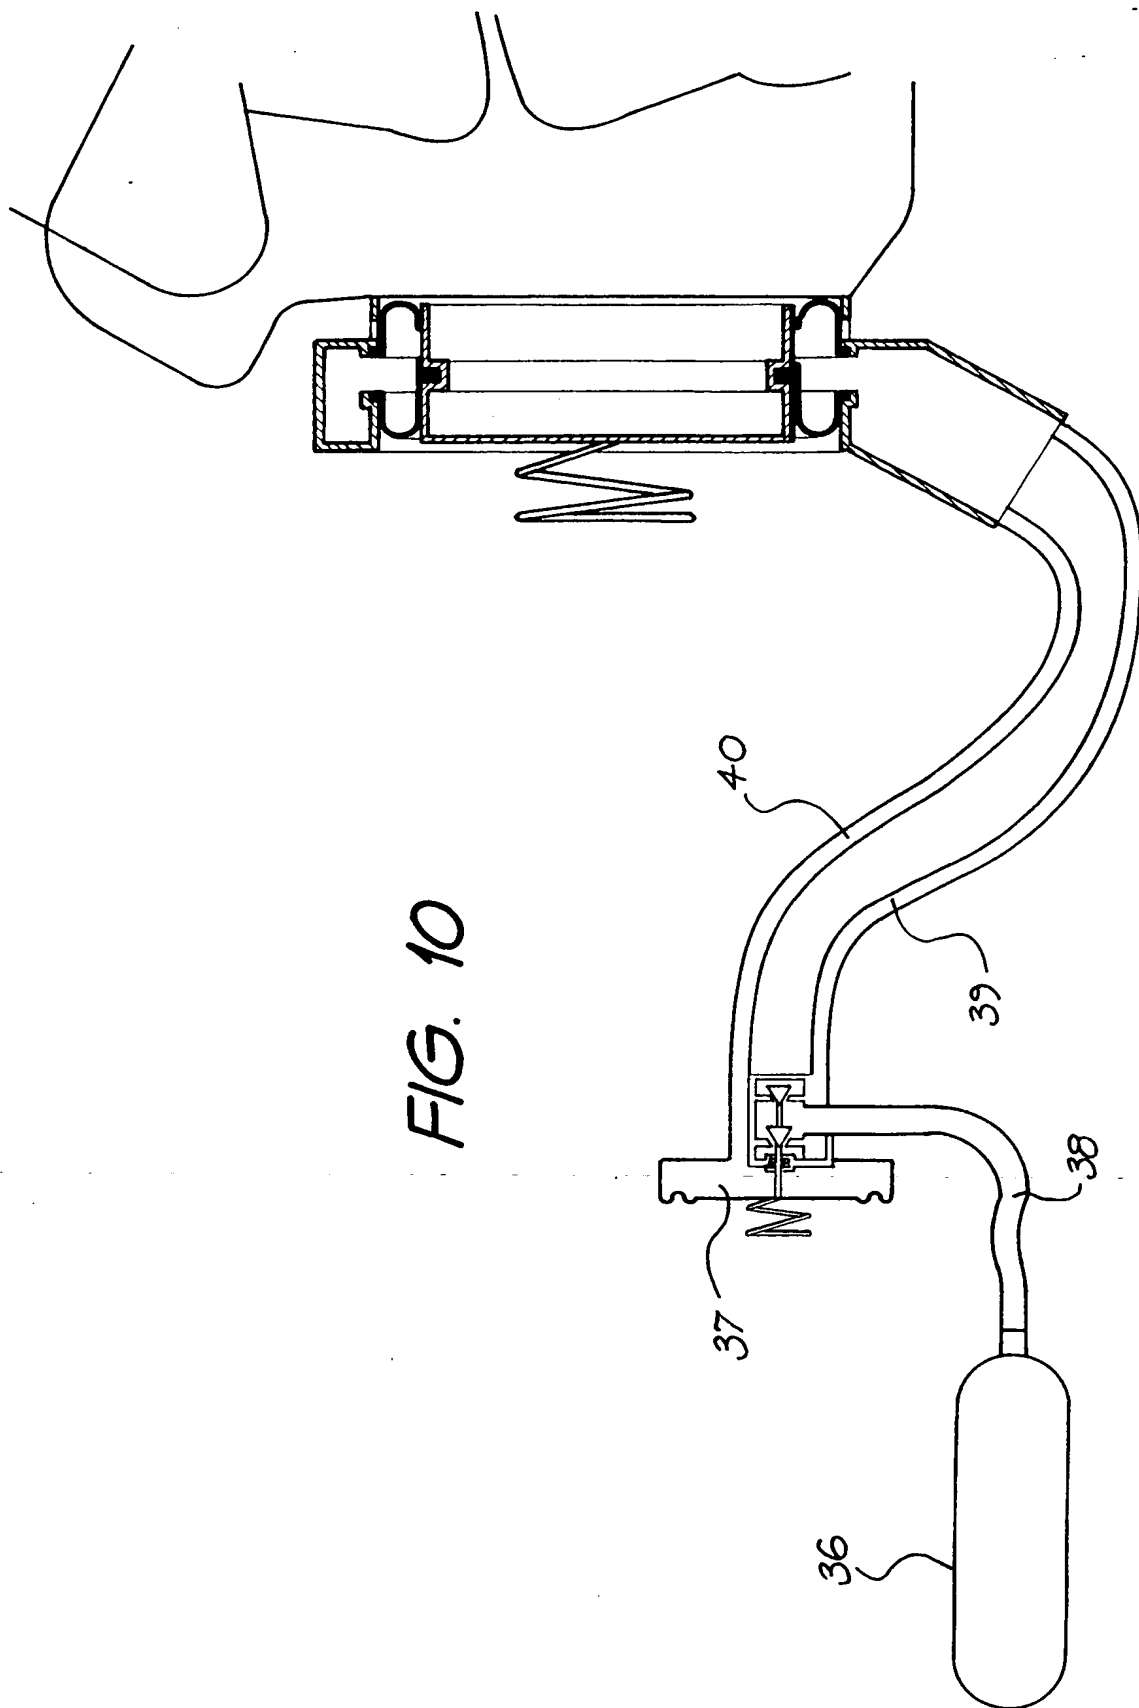

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/AU 98/00099

A. CLASSIFICATION OF SUBJECT MATTER												
Int Cl ⁶ : A62B 9/02, 18/10 F16K 7/02, 7/18												
According to International Patent Classification (IPC) or to both national classification and IPC												
B. FIELDS SEARCHED												
Minimum documentation searched (classification system followed by classification symbols) IPC: A62B 9/02, 18/10 F16K 7/02, 7/18												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)												
C. DOCUMENTS CONSIDERED TO BE RELEVANT												
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
A	US 4428392 A (JONES et al), 31 January 1984	1-10										
A	US 4552177 (LAPEYRE), 12 November 1985 Figure 1	1-10										
X A	SE 8602258 A (HB GSB BOLAGET HANDELSBOLAG) 15 January 1988	1 2-10										
X A	WO 82/01924 A (DESIGN & TECHNOLOGY SERVICES PTY LTD) 10 June 1982 Figures	1 2-10										
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input type="checkbox"/> See patent family annex												
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier document but published on or after the international filing date</td> <td>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier document but published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier document but published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 9 April 1998		Date of mailing of the international search report 2 MAY 1998										
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer  G.B. NATH Telephone No.: (02) 6283 2126										

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 98/00099

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2174503 A (WHIPPLE), 26 September 1939 Figures	1 2-10
A	US 1618671 A (PICK), 22 February 1927 Figures	1-10
X A	Patent Abstracts of Japan. M-584, Page 7, JP 61-270567 A (TAIYO SANGYO KK), 29 November 1986	1 2-10